


# LED Track Light B-series Datasheet



Number of heads	1
Mounting	Track mounting
Lamps description	LED 20W, 30W, 40W, 50W   2500-6000K
Luminaire luminous flux	CRI >90+ 109W/Lm   CRI >80+ 118W/Lm
Voltage (V)	220/240
Environment	Indoor
Notes	LED track light B-series driver housing is located on the outside of the luminaire. This allows the track light better cooling and prevents COB LED overheating.

LED light to be installed on 3-phase 4 wire track.



- White      ● Silver
- Black

Dimensions: 205 x Ø98mm

## OPTICAL


Reflector finish	Aluminum
Aiming	Adjustable 35 degrees
Light distribution symmetry	Symmetric
Beam angle	15°/24°/36° /60°
Color temperature	2500-6000K

## ELECTRICAL

Wattage	20W, 30W, 40W, 50W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60HZ
Voltage	110-240V AC

## PHYSICAL

Spot diameter (mm)	Ø 98
Construction material	6063 ALU
Weight (kg)	1,6
Luminaire lifespan	50 000h
LED module	PHILIPS/BRIDGELUX COB LED 100Lm/W
Driver	Flicker free, PHILIPS SLIM, ALL-LOOKING Optional drivers: DALI, DIM

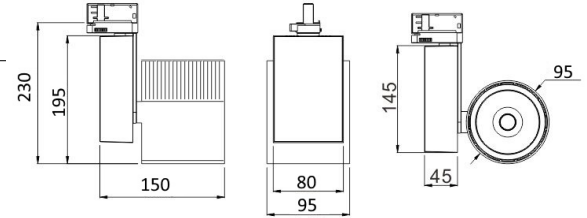

Working temperature      Operation: -30 to +40 °C



## CERTIFICATIONS

