

# LED Track Light B-series

## Datasheet



Number of heads	1
Mounting	Track mounting
Lamps description	Heavy heat sink
Luminaire luminous flux	CRI >90+ 120Lm/W
Voltage (V)	220/240
Environment	Indoor
Notes	LED track light B-series Lifud no flicker driver housing is located on the outside of the luminarie. This allows the track light better cooling and prevents COB LED overheating.

### OPTICAL

Reflector finish	Aluminum high quality GR reflector
Aiming	Spot
Light distribution symmetry	Symmetric
Beam angle	15°/24°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/6000K



### ELECTRICAL

Wattage	40W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60HZ
Voltage	110-240V AC

### PHYSICAL


Spot diameter (mm)	Ø 85
Construction material	Aluminium
Weight (kg)	1,6
Luminaire lifespan	50 000h
LED module	BRIDGELUX COB LED 120Lm/W
Driver	Flicker free, Lifud Optional driver: DALI, DIM
Working temperature	Operation: -30 to +50 °C
Warranty	5 years from purchase date

LED light to be installed on 3-phase 4 wire track.



Dimensions

40W

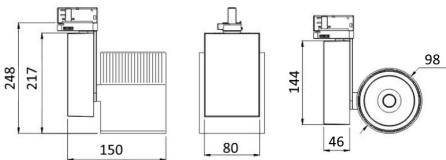

### CERTIFICATIONS

