

LED Track Light B-series Datasheet



Number of heads	1
Mounting	Track mounting
Lamps description	Heavy heat sink
Luminaire luminous flux	CRI >90+ 120Lm/W
Voltage (V)	220/240
Environment	Indoor
Notes	LED track light B-series Lifud no flicker driver housing is located on the outside of the luminaire. This allows the track light better cooling and prevents COB LED overheating.

OPTICAL

Reflector finish	Aluminum high quality GR reflector
Aiming	Spot
Light distribution symmetry	Symmetric
Beam angle	15°/24°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/6000K



ELECTRICAL

Wattage	50W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60HZ
Voltage	110-240V AC

PHYSICAL


Spot diameter (mm)	Ø 85
Construction material	Aluminium
Weight (kg)	1,6
Luminaire lifespan	50 000h
LED module	BRIDGELUX COB LED 120Lm/W
Driver	Flicker free, Lifud Optional driver: DALI, DIM
Working temperature	Operation: -30 to +50 °C
Warranty	5 years from purchase date

LED light to be installed on 3-phase 4 wire track.



Dimensions

50W

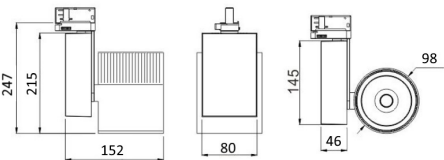

CERTIFICATIONS

