

LED Recessed Light DAMME Datasheet



Number of heads	1
Mounting	Recessed mounting
Lamps description	LED 9W 3000K CRI 90+
Luminaire luminous flux	100W/Lm 900Lm
Voltage (V)	180-240
Environment	Indoor, IP65
Notes	LED Recessed Light DAMME has a modern look with a high quality finishing.

OPTICAL

Reflector finish	Aluminum
Aiming	24°
Light distribution symmetry	Symmetric
Beam angle	24° Medium
Color temperature	3000K

ELECTRICAL

Wattage	9W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60HZ
Voltage	180-240V AC


PHYSICAL

Spot diameter (mm)	Ø 45
Construction material	Aluminium
Weight (kg)	0,6
Luminaire lifespan	30 000h
LED module	PHILIPS/BRIDGELUX COB LED 100 lm/W
Driver	Flicker free, dimmable
Working temperature	Operation: 0 to +40 °C


Colors:

- White
- Black

Dimensions: 90 x 90mm

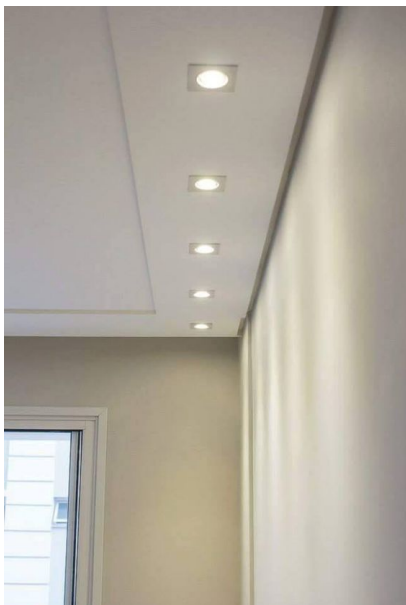

CERTIFICATIONS

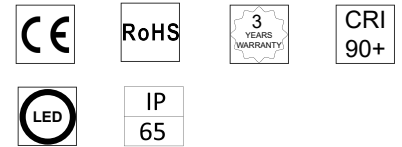

Installation Diagram

