

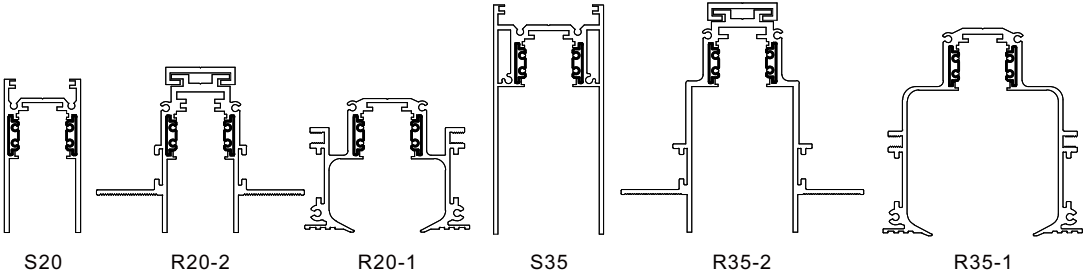
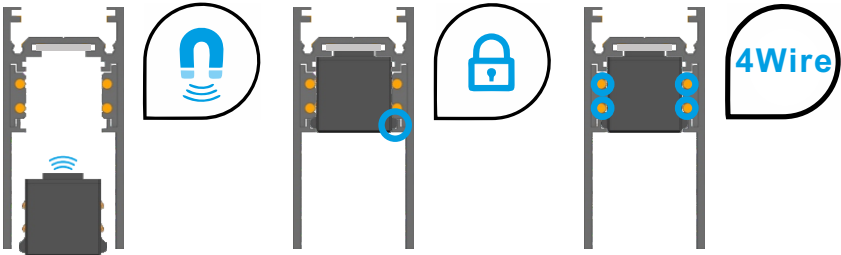



Magnet track system



S20 Magnet Track

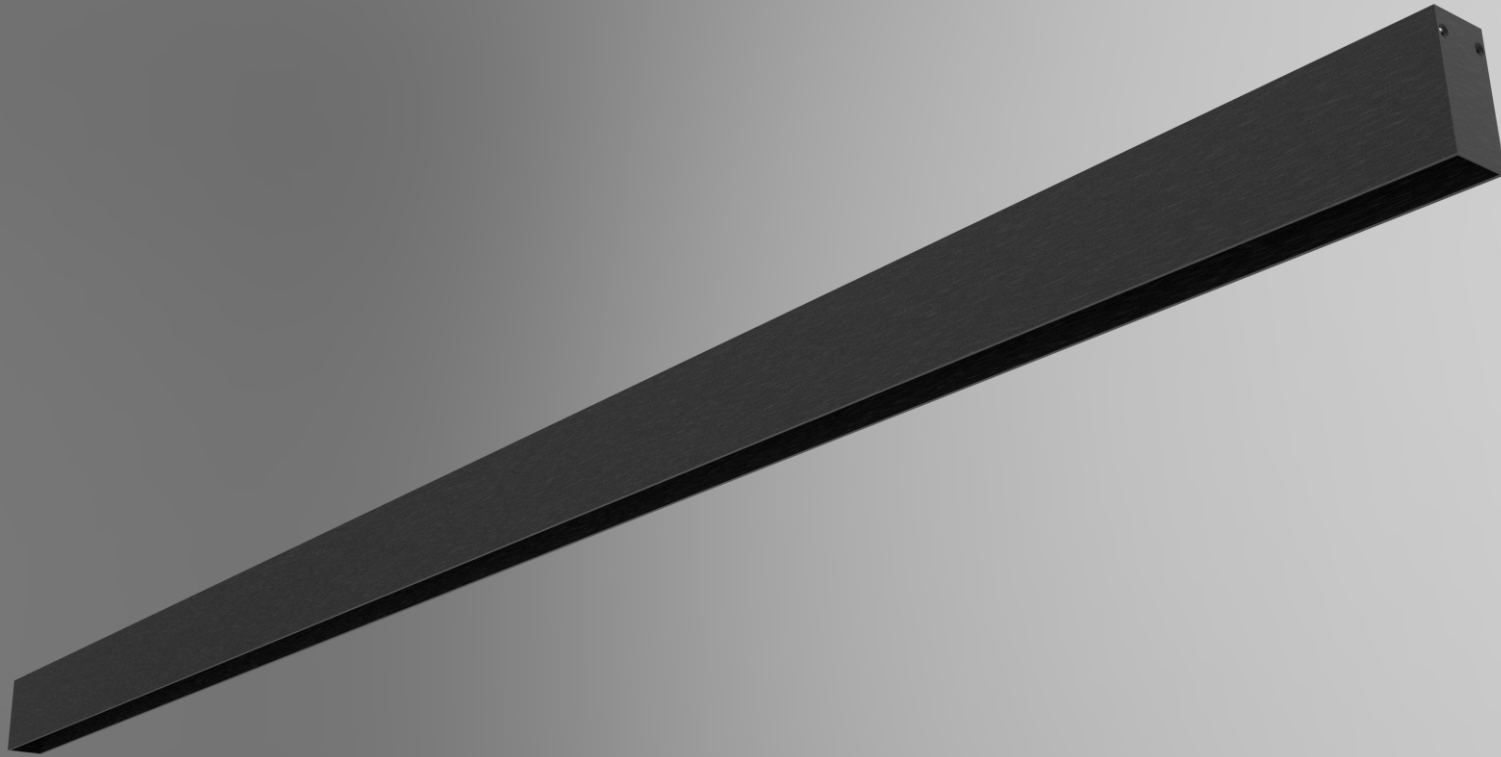


Surface mounted track




Surface mounted track (suspension)

Product Information	Input voltage	DC48V
	Max. load	up to 600W
	Max. track length	up to 50m
	Track sections	1m / 2m / 3m
	Available colour	Satin Black
	Certification	CE / ROHS

Track accessories
Available for recessed track.



L-joint 90°



Wall to wall connector (in)



Wall to wall connector (out)



End cap



Track connection plate (allen crews included)



Live end (without cable)



Live end (with 3 meter cable)





Track connector




Suspension set (1.5m)

S35 Magnet Track

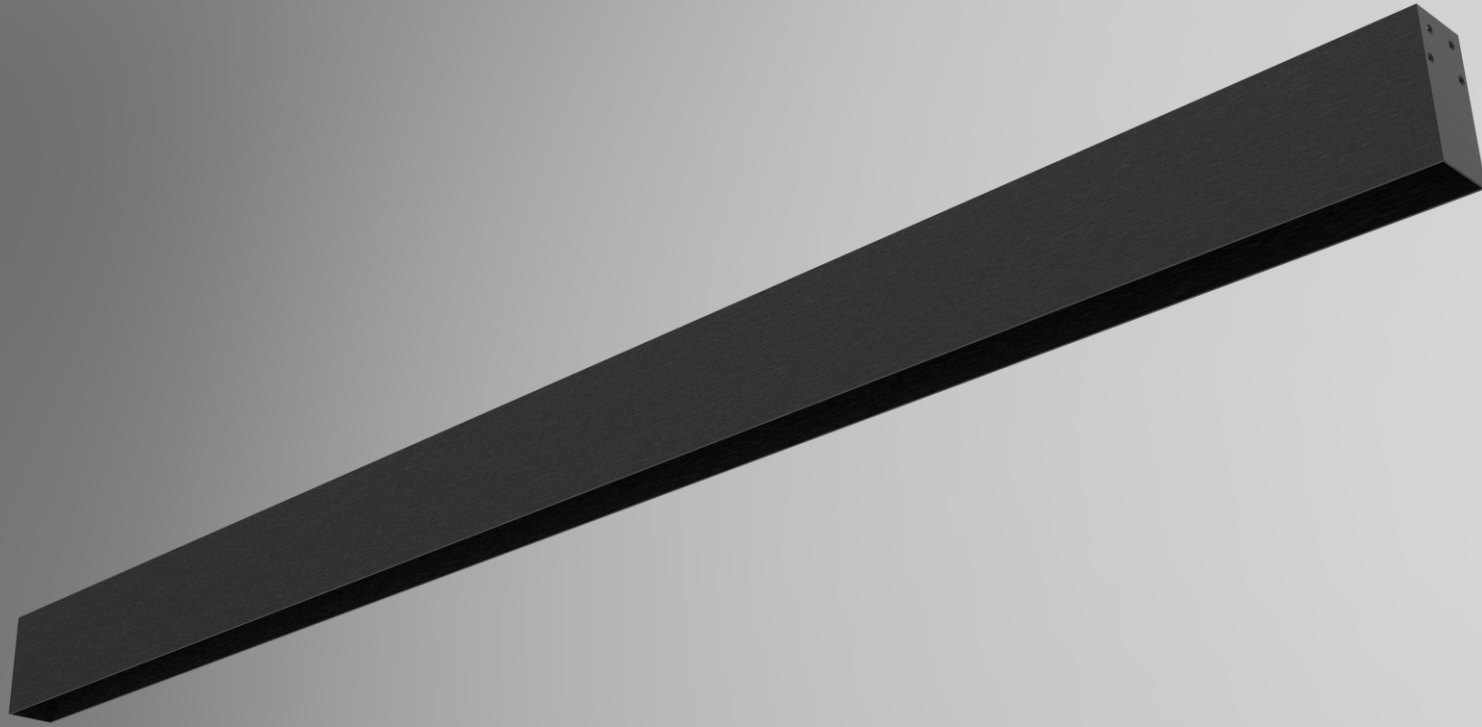

Surface mounted track




Surface mounted track (suspension)

Product Information	Input voltage	DC48V
	Max. load	up to 600W
	Max. track length	up to 50m
	Track sections	1m / 2m / 3m
	Available colour	Satin Black
	Certification	CE / ROHS


Track accessories
Available for surface mounted track.



L-joint 90°



Wall to wall connector (in)



Wall to wall connector (out)



End cap



Track connection plate (allen crews included)



Live end (without cable)



Live end (with 3 meter cable)





Track connector



Suspension set (1.5m)

R20-1 Magnet Track

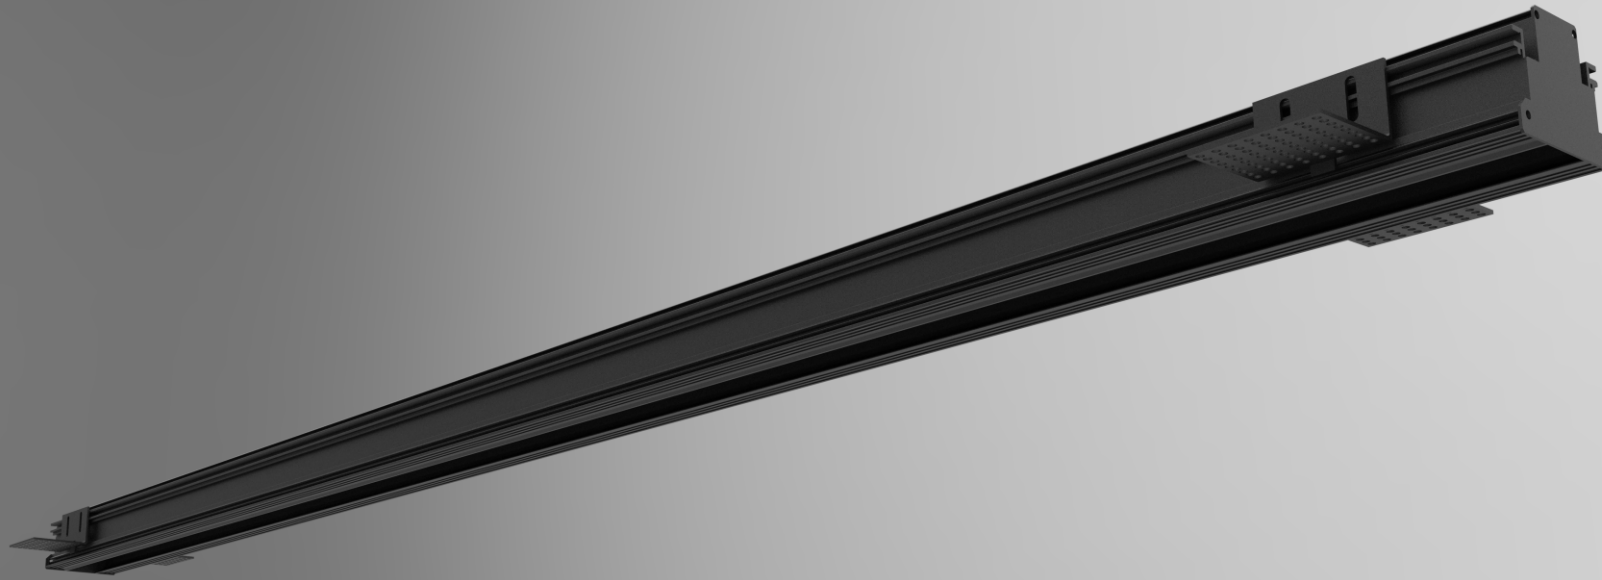

Recessed track

Product Information	Input voltage	DC48V
	Max. load	up to 600W
	Max. track length	up to 50m
	Track sections	1m / 2m / 3m
	Available colour	Oxidating Black
	Certification	CE / ROHS

Track accessories
Available for recessed track.



L-joint 90°



Wall to wall connector (in)



Wall to wall connector (out)



End cap



Live end (without cable)



Live end (with 3 meter cable)





Track connector



Suspension set (1.5m)

R20-2 Magnet Track

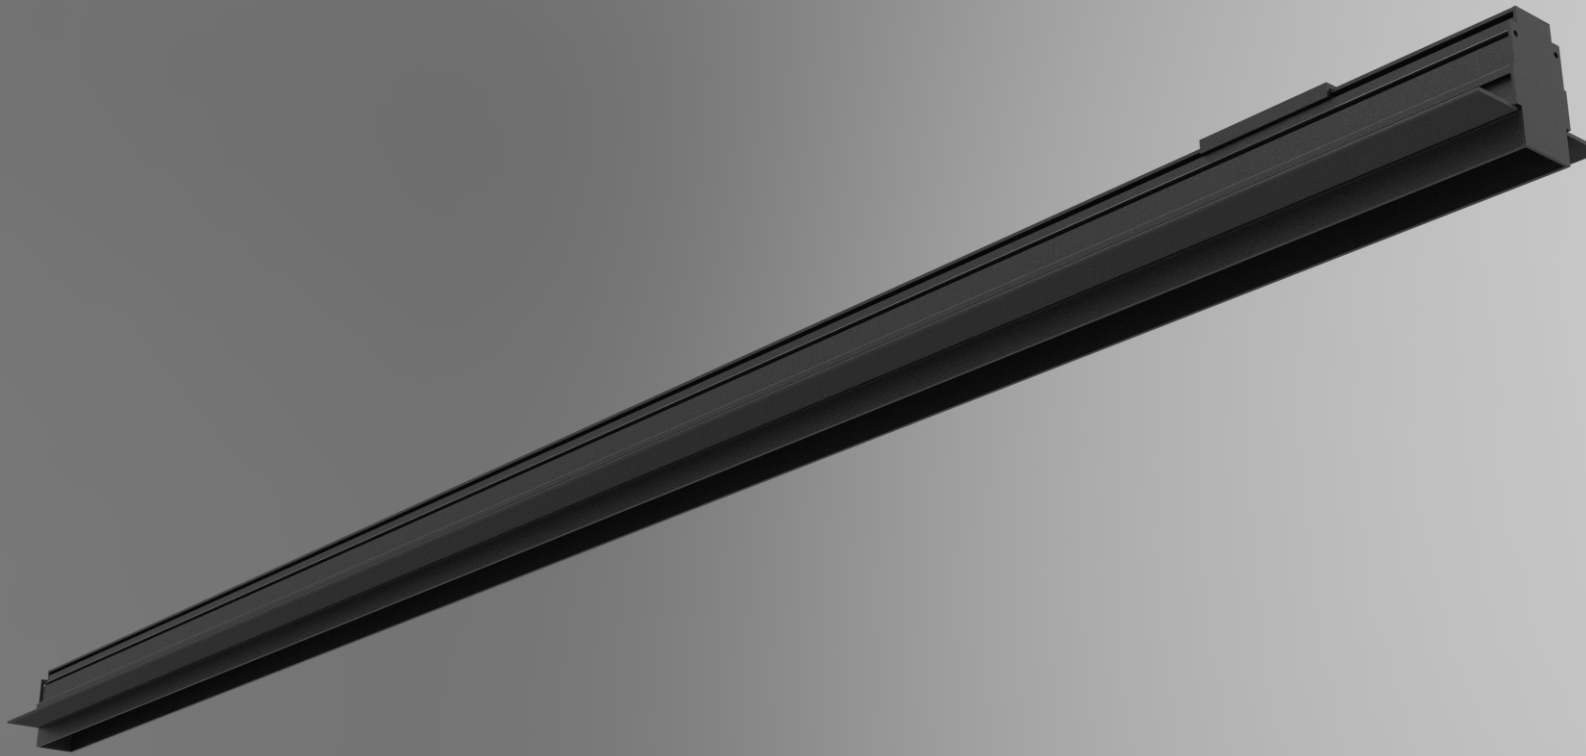


Recessed track

Product Information	Input voltage	DC48V
	Max. load	up to 600W
	Max. track length	up to 50m
	Track sections	1m / 2m / 3m
	Available colour	Oxidating Black
	Certification	CE / ROHS

Track accessories


Available for recessed track.



L-joint 90°



Wall to wall connector (in)



Wall to wall connector (out)



End cap



Live end (without cable)





Live end (with 3 meter cable)



Track connector

R35-1 Magnet Track

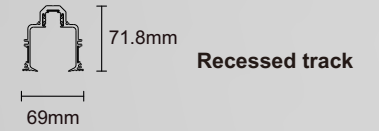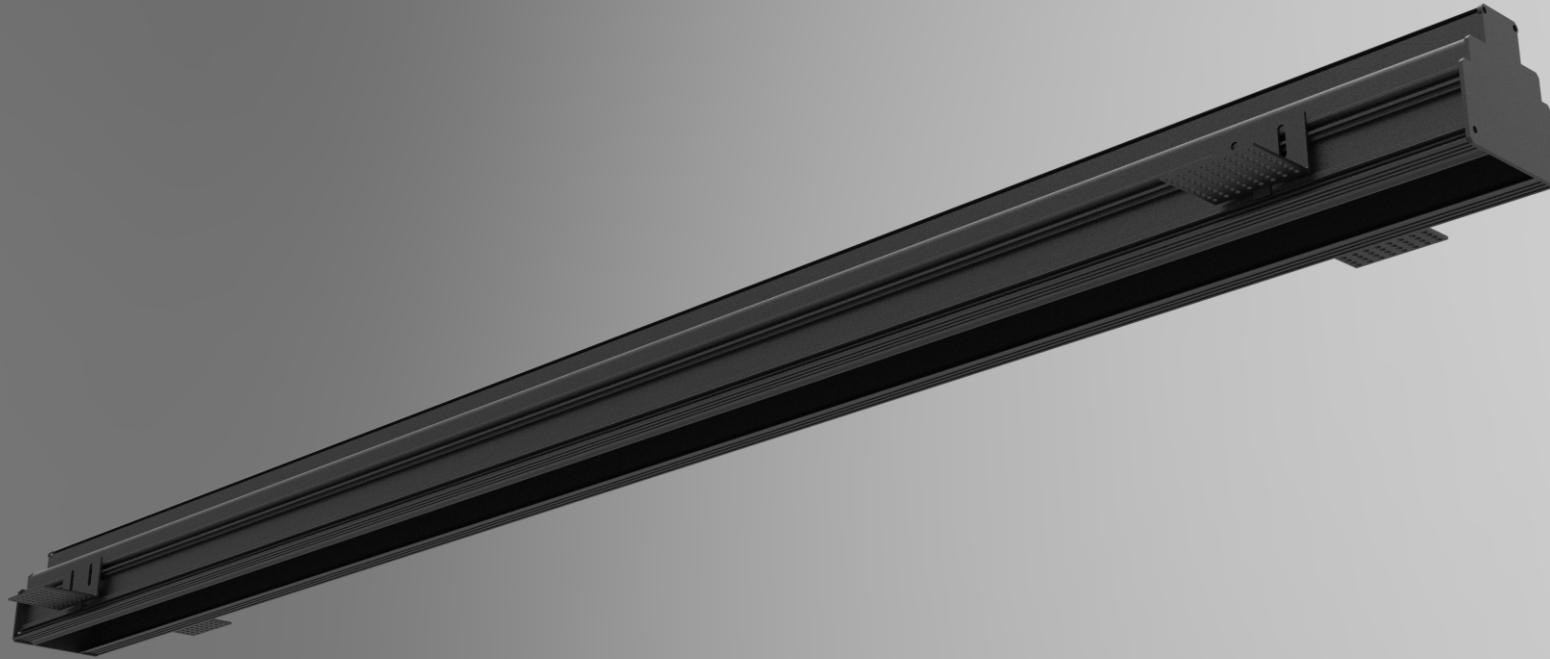


Product Information	Input voltage	DC48V
	Max. load	up to 600W
	Max. track length	up to 50m
	Track sections	1m / 2m / 3m
	Available colour	Oxidating Black
	Certification	CE / ROHS


Track accessories
Available for recessed track.



L-joint 90°



Wall to wall connector (in)



Wall to wall connector (out)



End cap



Live end (without cable)





Live end (with 3 meter cable)



Track connector

R35-2 Magnet Track

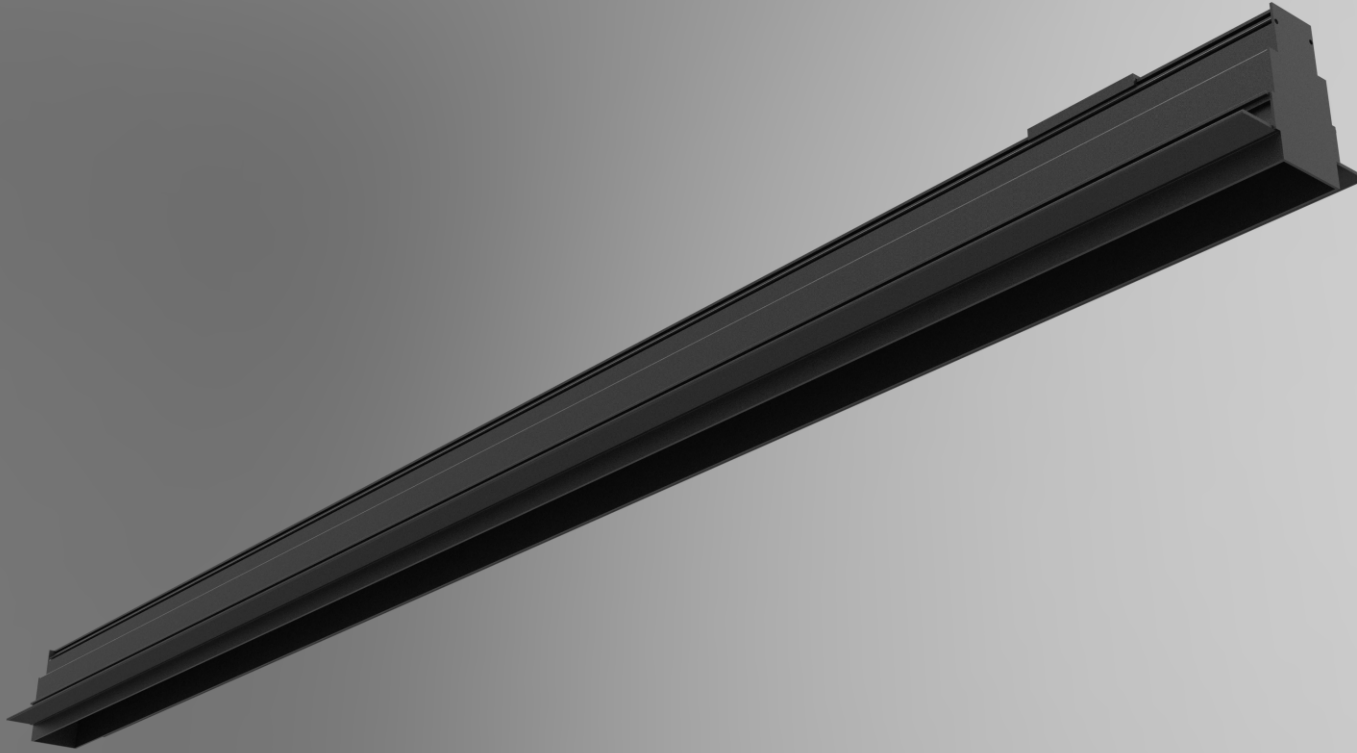


Recessed track


Product Information	Input voltage	DC48V
	Max. load	up to 600W
	Max. track length	up to 50m
	Track sections	1m / 2m / 3m
	Available colour	Oxidating Black
	Certification	CE / ROHS

Track accessories


Available for recessed track.



L-joint 90°



Wall to wall connector (in)



Wall to wall connector (out)



End cap



Live end (without cable)



Live end (with 3 meter cable)



Track connector


M35-SP-4



Product Information	Input voltage	DC48V
	Power	8W
	Efficiency	80lm / W
	CRI	>90
	Beam angle	10°/15°/20°/25°/30°
	CCT	3000K/4000K/5000K
	Available colour	black / white
	Certification	CE / ROHS



8W

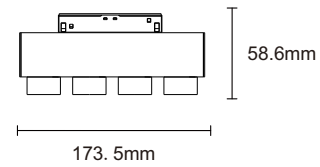


8W

M35-LB




10W / 20W / 30W


10W
M35-LB-5



20W
M35-LB-10

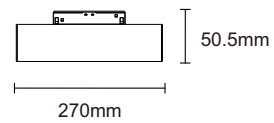

30W
M35-LB-15

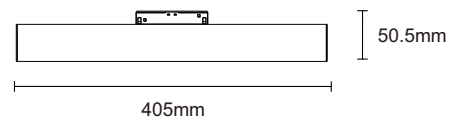


Product Information	Input voltage	DC48V
	Power	10W / 20W / 30W
	Efficiency	80lm / W
	CRI	>90
	Lens	15°/30°/45°
	CCT	3000K/4000K/5000K
	Available colour	black / white
	Certification	CE / ROHS

M20 Lens




Product Information	Input voltage	DC48V
	Power	4.5W / 9W
	Efficiency	80lm / W
	CRI	>90
	Lens	15°/30°/60°
	CCT	3000K/4000K/5000K
	Available colour	black / white
	Certification	CE / ROHS




4.5W / 9W


4.5W
M20 Lens-9

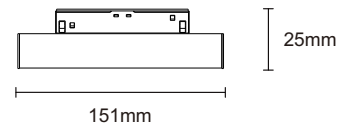

9W
M20 Lens-18

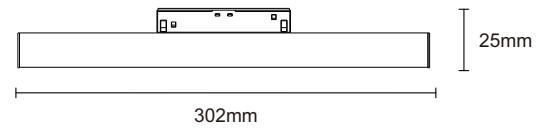


M20 diffuser

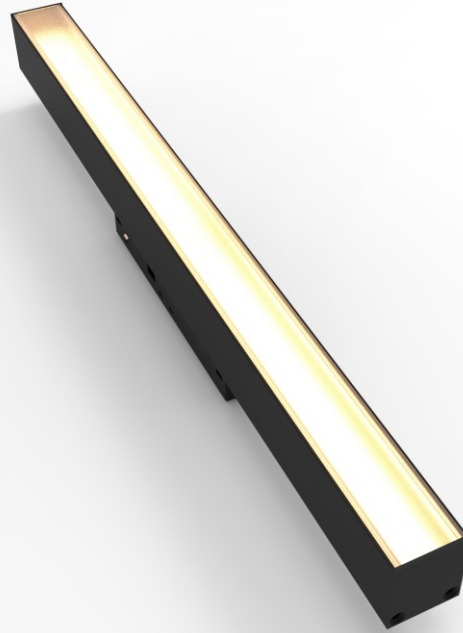


7.2W / 14.4W / 28.8W

Product Information	Input voltage	DC48V
	Power	7.2W / 14.4W / 28.8W
	Efficiency	80lm / W
	CRI	>90
	Lens	120°
	CCT	3000K/4000K/5000K
	Available colour	black / white
	Certification	CE / ROHS


7.2W
M20 diffuser-300

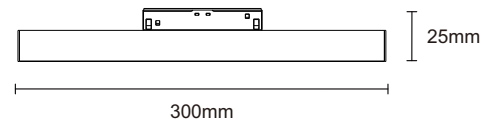


14.4W
M20 diffuser-600

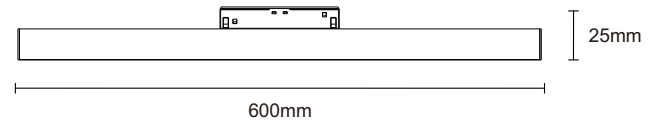


28.8W
M20 diffuser-1200

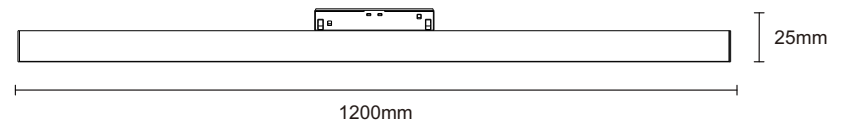

M35 diffuser-90°

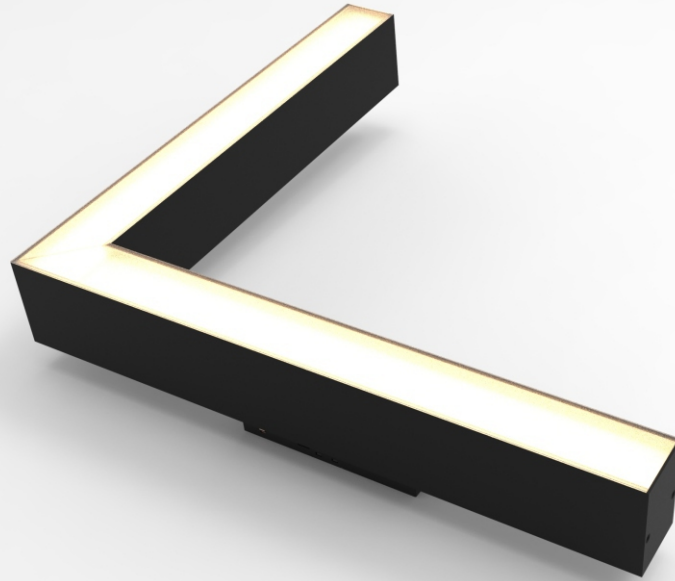


Product Information	Input voltage	DC48V
	Power	24W
	Efficiency	80lm / W
	CRI	>90
	Lens	120°
	CCT	3000K/4000K/5000K
	Available colour	black / white
	Certification	CE / ROHS



24W

24W
M35 diffuser-90°

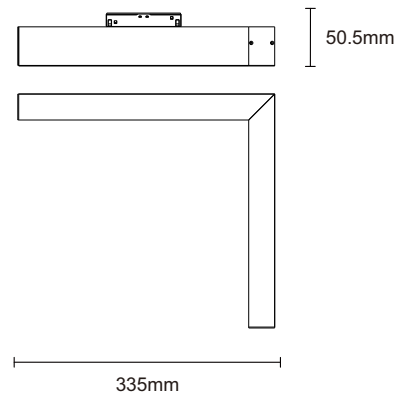


M35 diffuser




7.2W / 14.4W / 28.8W

Product Information	Input voltage	DC48V
	Power	7.2W / 14.4W / 28.8W
	Efficiency	80lm / W
	CRI	>90
	Lens	120°
	CCT	3000K/4000K/5000K
	Available colour	black / white
	Certification	CE / ROHS


7.2W
M35 diffuser-300

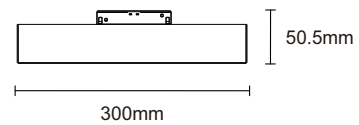


14.4W
M35 diffuser-600

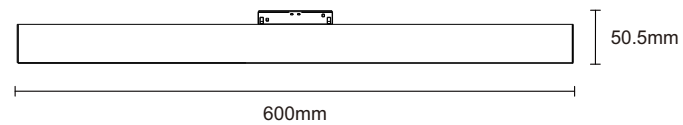

28.8W
M35 diffuser-1200

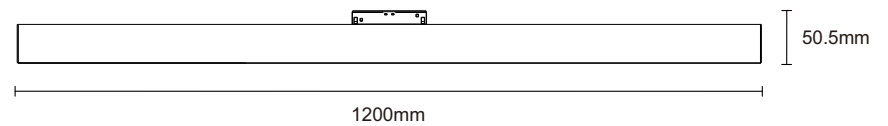


M35-107B

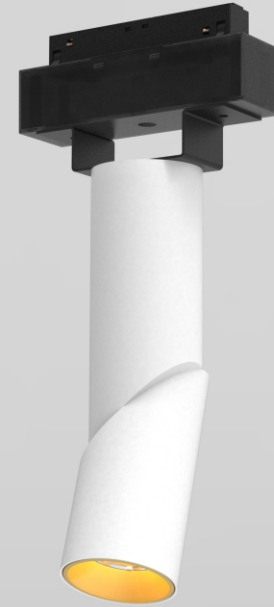

Product Information	Input voltage	DC48V
	Power	9W
	Efficiency	80lm / W
	CRI	>90
	Lens	20°/40°/60°
	CCT	3000K/4000K/5000K
	Available colour	black / white
	Certification	CE / ROHS



9W




163mm

Ø50mm

9W


M35 Len

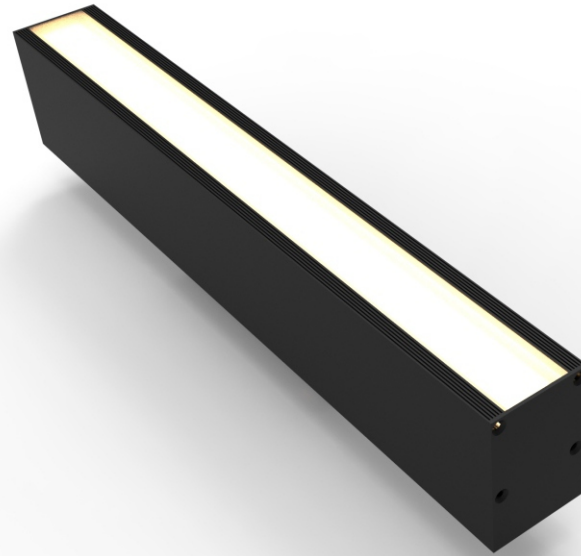


12W / 24W

Product Information	Input voltage	DC48V
	Power	12W / 24W
	Efficiency	80lm / W
	CRI	>90
	Lens	30°x85° / 75°x95° / 60° / 90°
	CCT	3000K/4000K/5000K
	Available colour	black / white
	Certification	CE / ROHS


12W
M35 Len-284

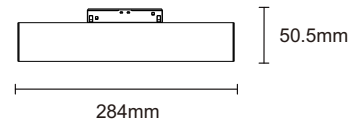

24W
M35 Len-568

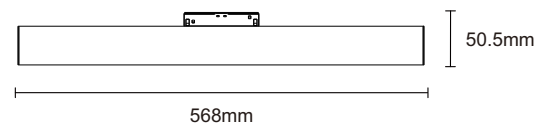

M35-TL

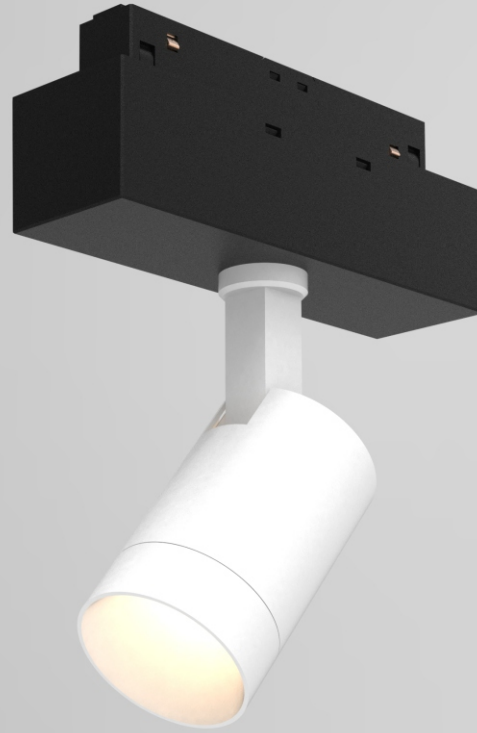


Product Information	Input voltage	DC48V
	Power	12W / 20W / 30W
	Efficiency	80lm / W
	CRI	>90
	Lens	10°/15°/20°/25°/30°
	CCT	3000K/4000K/5000K
	Available colour	black / white
Certification	CE / ROHS	




12W / 20W / 30W


12W
M35-TL-12W

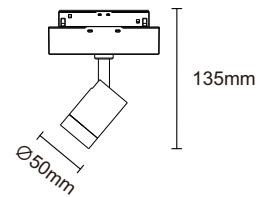

20W
M35-TL-20W

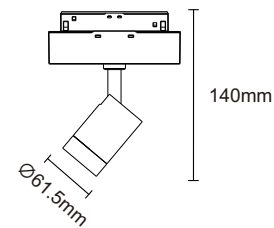

30W
M35-TL-30W

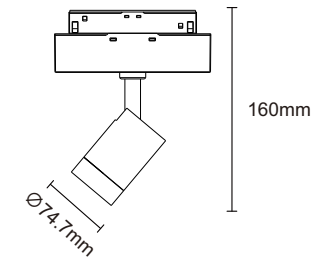


M35-TW



Product Information	Input voltage	DC48V
	Power	9W
	Efficiency	80lm / W
	CRI	>90
	Lens	20°/40°/60°
	CCT	3000K/4000K/5000K
	Available colour	black / white
	Certification	CE / ROHS



9W

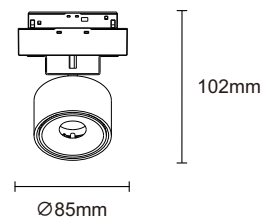

9W

M35-DISK




Product Information	Input voltage	DC48V
	Power	9W / 15W
	Efficiency	80lm / W
	CRI	>90
	Lens	20°/40°/60°
	CCT	3000K/4000K/5000K
	Available colour	black / white
	Certification	CE / ROHS




9W / 15W

9W
M35-DISK- 9W



15W
M35-DISK- 15W

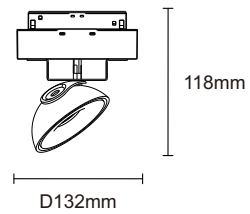

M35-FM




Product Information	Input voltage	DC48V
	Power	10W
	Efficiency	80lm / W
	CRI	>90
	Lens	20°/40°/60°
	CCT	3000K/4000K/5000K
	Available colour	black / white
	Certification	CE / ROHS



10W

10W



Ø48mm

220mm