



TECHNICAL INFORMATION

Watts:	6
Lumens:	660
Shape:	Round
Input Power:	AC:220-240V, 50/60Hz
Long Life:	20,000 Hours
Unit Color:	White
Body Type:	Die-Cast Aluminium
PF:	>0.55
LED Chip Type:	SMD
CRI:	>80
Operation Temperature:	-25°C to +50°C
Dimmable:	No
Beam Angle:	360°
Color Temperature:	4000K
Dimension:	Ø135mm


ROUND BRIDGELUX

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 7525 - 1253 940

[View more details](#)

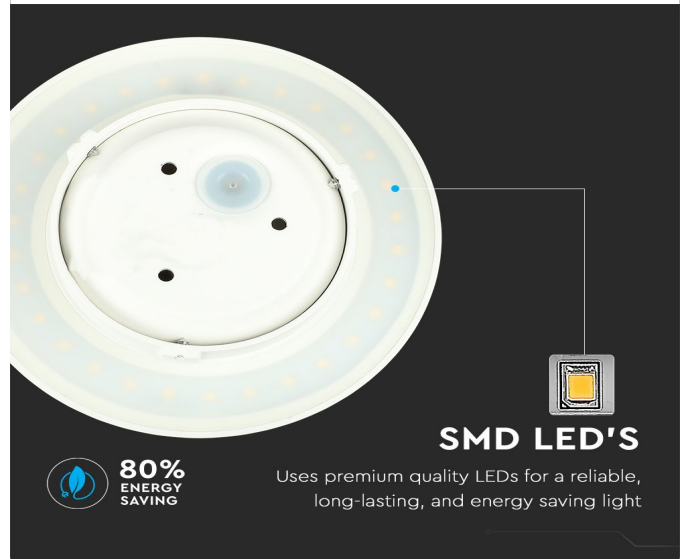

SMD LED'S

Uses premium quality LEDs for a reliable, long-lasting, and energy saving light



80%
ENERGY
SAVING



IP65
RATING



2 YEAR
WARRANTY



CRI>80

FEATURES

- Splendid designs made of high endurance Die-Cast Aluminium material
- Ingress protection: {ip_rating}
- Excellent heat dissipation
- Fitted with high quality SMD chips for better reliability and longer lifespan
- Perfect lighting option for landscapes, gardens, patios etc.

CE/EMC

CE/LVD



PACKAGING

Gross Weight (Kgs): 0.55
Unit CBM: 0.001125
Dimension: Ø135mm

MASTER BOX PACKAGING

Box Qty: 20
Qty Per Pallet: 720
Length (Box) mm: 150
Width (Box) mm: 150
Height (Box) mm: 50

LISTING DETAILS

Commodity Code: 9405403990
Ean Code: 3800157620024