





TECHNICAL INFORMATION Watts: Lumens: Input Power: AC:220-240V, 50Hz Long Life: 20,000 Hours Unit Color: White Body Type: Aluminium PF: >0.6 LED Chip Type: SMD CRI: >80 -20°C to +45°C Operation Temperature: Dimmable: No



Beam Angle: Color Temperature:

Dimension:







170x40x80mm

3000K



FEATURES

- Modern range of Up-Down lights with sleek and stylish designs
- Wide range of up-down beams: Up 150°/Down 150°
- High quality aluminium build for efficient heat dissipation
- Suitable for decor, restaurants, residential, facades etc.

C€/LVD CE/EMC




SEMI OVAL BRIDGELUX

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 8613 - 1253 940 View more details

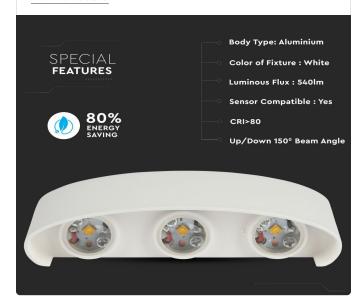

PACKAGING

Gross Weight (Kgs): 0.539 Unit CBM: 0.000748125 Dimension: 170x40x80mm

MASTER BOX PACKAGING

Box Qty: Qty Per Pallet: 1000 Length (Box) mm: 45 Width (Box) mm: 175 Height (Box) mm: 95

LISTING DETAILS







TECHNICAL INFORMATION Watts:

Watts:	6
Lumens:	540
Input Power:	AC:220-240V, 50Hz
Long Life:	20,000 Hours
Unit Color:	White
Body Type:	Aluminium
PF:	>0.6
LED Chip Type:	SMD
CRI:	>80
Operation Temperature:	-20°C to +45°C
Dimmable:	No
Beam Angle:	150°
Color Temperature:	4000K
Dimension:	170x40x80mm











FEATURES

- Modern range of Up-Down lights with sleek and stylish designs
- Wide range of up-down beams: Up 150°/Down 150°
- High quality aluminium build for efficient heat dissipation
- Suitable for decor, restaurants, residential, facades etc.

C€/EMC C€/LVD




SEMI OVAL BRIDGELUX

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 8614 - 1253 940 View more details

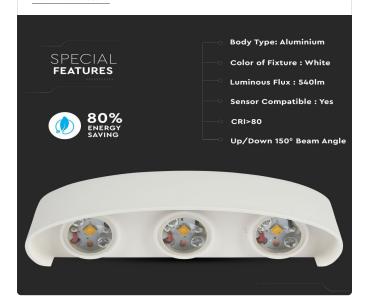

PACKAGING

Gross Weight (Kgs): 0.539
Unit CBM: 0.000748125
Dimension: 170x40x80mm

MASTER BOX PACKAGING

Box Qty: 20 Qty Per Pallet: 1000 Length (Box) mm: 45 Width (Box) mm: 175 Height (Box) mm: 95

LISTING DETAILS







TECHNICAL INFORMATION Watts: Lumens: Input Power: AC:220-240V, 50Hz Long Life: 20,000 Hours Unit Color: Black Body Type: Aluminium >0.6 LED Chip Type: SMD CRI: >80 -20°C to +45°C Operation Temperature: Dimmable: No Beam Angle: 150° Color Temperature: 3000K 170x40x80mm





Dimension:







FEATURES

- Modern range of Up-Down lights with sleek and stylish designs
- Wide range of up-down beams: Up 150°/Down 150°
- High quality aluminium build for efficient heat dissipation
- Suitable for decor, restaurants, residential, facades etc.

C€/LVD CE/EMC




SEMI OVAL BRIDGELUX

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand endless solutions

SKU: 8615 - 1253 938 View more details

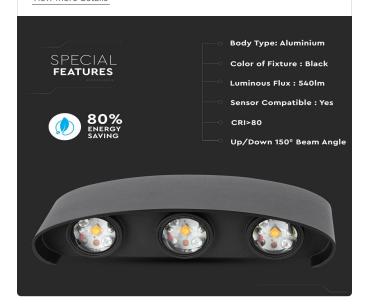

PACKAGING

Gross Weight (Kgs): 0.539 Unit CBM: 0.000748125 Dimension: 170x40x80mm

MASTER BOX PACKAGING

Box Qty: Qty Per Pallet: 1000 Length (Box) mm: 45 Width (Box) mm: 175 Height (Box) mm: 95

LISTING DETAILS







TECHNICAL INFORMATION Watts: Lumens: Input Power: AC:220-240V, 50Hz Long Life: 20,000 Hours Unit Color: Black Body Type: Aluminium >0.6 LED Chip Type: SMD CRI: >80 -20°C to +45°C Operation Temperature: Dimmable: No Beam Angle: 150° Color Temperature: 4000K 170x40x80mm Dimension:











FEATURES

- Modern range of Up-Down lights with sleek and stylish designs
- Wide range of up-down beams: Up 150°/Down 150°
- High quality aluminium build for efficient heat dissipation
- Suitable for decor, restaurants, residential, facades etc.

C€/EMC C€/LVD




SEMI OVAL BRIDGELUX

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand endless solutions

SKU: 8616 - 1253 938 View more details

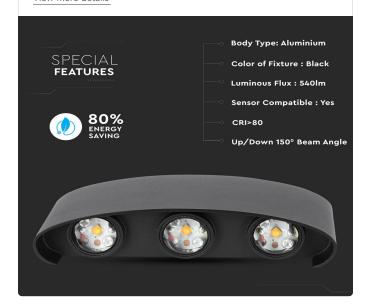

PACKAGING

Gross Weight (Kgs): 0.539
Unit CBM: 0.000748125
Dimension: 170x40x80mm

MASTER BOX PACKAGING

Box Qty: 20 Qty Per Pallet: 1000 Length (Box) mm: 45 Width (Box) mm: 175 Height (Box) mm: 95

LISTING DETAILS







TECHNICAL INFORMATION Watts: Lumens: Input Power: AC:220-240V, 50Hz Long Life: 20,000 Hours Unit Color: White Body Type: Aluminium >0.6 LED Chip Type: SMD CRI: >80 -20°C to +45°C Operation Temperature: Dimmable: No Beam Angle: 150° Color Temperature: 3000K 220x48x90mm Dimension:











FEATURES

- Modern range of Up-Down lights with sleek and stylish designs
- Elegant replacement for traditional up-down lighting
- Fitted with high quality SMD chips for better reliability and longer lifespan
- Robust Aluminium build for efficient heat dissipation
- Suitable for living rooms, pathways, balconies, facades etc.

C€/EMC C€/LVD




SEMI OVAL BRIDGELUX

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 8617 - 1234 940 View more details

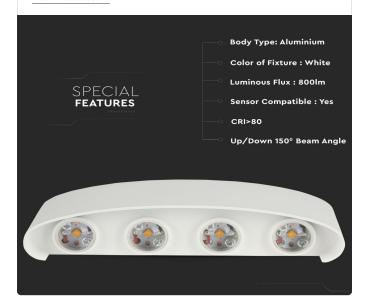

PACKAGING

Gross Weight (Kgs): 0.839
Unit CBM: 0.001299375
Dimension: 220x48x90mm

MASTER BOX PACKAGING

Box Qty: 20 Qty Per Pallet: 600 Length (Box) mm: 55 Width (Box) mm: 225 Height (Box) mm: 105

LISTING DETAILS







TECHNICAL INFORMATION Watts: Lumens: Input Power: AC:220-240V, 50Hz Long Life: 20,000 Hours Unit Color: White Body Type: Aluminium >0.6 LED Chip Type: SMD CRI: >80 -20°C to +45°C Operation Temperature: Dimmable: No Beam Angle: 150° Color Temperature: 4000K 220x48x90mm Dimension:











FEATURES

- Modern range of Up-Down lights with sleek and stylish designs
- Elegant replacement for traditional up-down lighting
- Fitted with high quality SMD chips for better reliability and longer lifespan
- Robust Aluminium build for efficient heat dissipation
- Suitable for living rooms, pathways, balconies, facades etc.

C€/EMC C€/LVD




SEMI OVAL BRIDGELUX

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 8618 - 1234 940 View more details

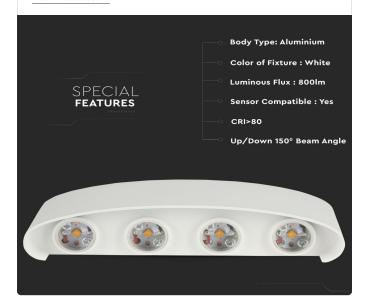

PACKAGING

Gross Weight (Kgs): 0.839
Unit CBM: 0.001299375
Dimension: 220x48x90mm

MASTER BOX PACKAGING

Box Qty: 20 Qty Per Pallet: 600 Length (Box) mm: 55 Width (Box) mm: 225 Height (Box) mm: 105

LISTING DETAILS







TECHNICAL INFORMATION Watts: Lumens: Input Power: AC:220-240V, 50Hz Long Life: 20,000 Hours Unit Color: Black Body Type: Aluminium >0.6 LED Chip Type: SMD CRI: >80 -20°C to +45°C Operation Temperature: Dimmable: No Beam Angle: 150° Color Temperature: 3000K



Dimension:







220x48x90mm



FEATURES

- Modern range of Up-Down lights with sleek and stylish designs
- Elegant replacement for traditional up-down lighting
- $^{\bullet}\,$ Fitted with high quality SMD chips for better reliability and longer lifespan
- Robust Aluminium build for efficient heat dissipation
- Suitable for living rooms, pathways, balconies, facades etc.

C€/EMC C€/LVD



SEMI OVAL BRIDGELUX

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 8619 - 1234 938 View more details



PACKAGING

Gross Weight (Kgs): 0.762
Unit CBM: 0.001299375
Dimension: 220x48x90mm

MASTER BOX PACKAGING

Box Qty: 20 Qty Per Pallet: 600 Length (Box) mm: 55 Width (Box) mm: 225 Height (Box) mm: 105

LISTING DETAILS







TECHNICAL INFORMATION Watts: Lumens: Input Power: AC:220-240V, 50Hz Long Life: 20,000 Hours Unit Color: Black Body Type: Aluminium >0.6 LED Chip Type: SMD CRI: >80 -20°C to +45°C Operation Temperature: Dimmable: No Beam Angle: 150°





Color Temperature:

Dimension:





4000K 220x48x90mm



FEATURES

- Modern range of Up-Down lights with sleek and stylish designs
- Elegant replacement for traditional up-down lighting
- $^{\bullet}\,$ Fitted with high quality SMD chips for better reliability and longer lifespan
- Robust Aluminium build for efficient heat dissipation
- Suitable for living rooms, pathways, balconies, facades etc.

C€/EMC C€/LVD



SEMI OVAL BRIDGELUX

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 8620 - 1234 938 View more details



PACKAGING

Gross Weight (Kgs): 0.839
Unit CBM: 0.001299375
Dimension: 220x48x90mm

MASTER BOX PACKAGING

Box Qty: 20 Qty Per Pallet: 600 Length (Box) mm: 55 Width (Box) mm: 225 Height (Box) mm: 105

LISTING DETAILS