



LED Track Light BAMBERG Datasheet

Number of heads	1
Mounting	Surface mounting
Lamps description	LED 12 W, CRI 80+
Luminaire luminous flux	100 lm/W
Voltage (V)	
Environment	Indoor
Notes	Luminaire height adjustable designed for a modern look. Light direction can be changed freely.



● White ● Black

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable 360°
Light distribution symmetry	Symmetric
Beam angle	36° Medium
Color temperature	3000K


ELECTRICAL

Wattage	12 W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60 HZ
Voltage	220-240 V

PHYSICAL

Spot diameter (mm)	Ø 36
Construction material	Aluminium
Weight (kg)	0,6
Luminaire lifespan	30 000h
LED module	PHILIPS/BRIDGELUX COB LED 100 lm/W
Driver	LIFUD flicker free
Working temperature	0 to +40°C
Warranty	3 years from purchase date

Dimensions: 102 x Ø101mm

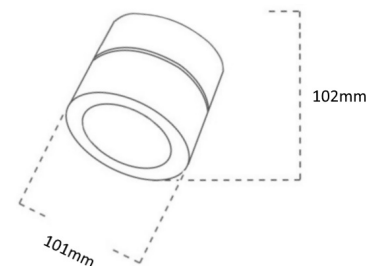

CERTIFICATIONS

