


LED Track Light Berlin Slim Datasheet



Number of heads	1
Mounting	Track mounting
Lamps description	LED 30W 4000K, CRI 90+
Luminaire luminous flux	100W/Lm
Voltage (V)	220/240
Environment	Indoor
Notes	LED Track Light Berlin Slim driver is located inside of the thin luminaire adapter. This makes it possible to avoid additional heat when operating the luminaire.

LED light to be installed on 3-phase 4 wire track.



OPTICAL


Reflector finish	Aluminum
Aiming	Adjustable 350 degrees
Light distribution symmetry	Symmetric
Beam angle	40° Medium
Color temperature	4000K

● White

ELECTRICAL

Wattage	30W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60HZ
Voltage	110-240V AC

Dimensions: 245 x Ø70mm

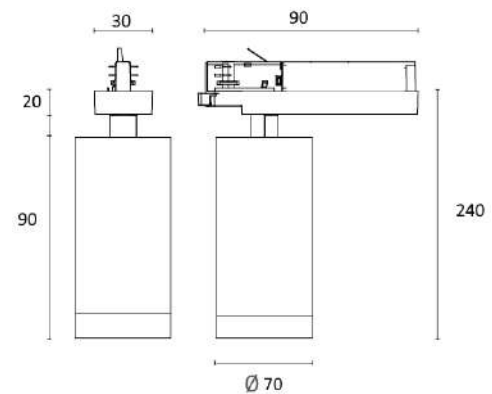

PHYSICAL

Spot diameter (mm)	Ø 70
Construction material	6063 Aluminium
Weight (kg)	1,0
Luminaire lifespan	50 000h
LED module	PHILIPS/BRIDGELUX COB LED 100 lm/W LIFUD
Driver	Flicker free, PHILIPS SLIM, ALL-LOOKING Optional drivers: DALI, DIM
Working temperature	Operation: -30 to +40 °C

CERTIFICATIONS

