



LED Track Light HERTEL Datasheet

Number of heads	1
Mounting	Track mounting
Lamps description	LED 15 W, 20 W, 30 W, CRI 90+
Luminaire luminous flux	100 lm/W
Voltage (V)	220-240
Environment	Indoor
Notes	LED Track Light HERTEL driver is located outside of the luminaire. This allows better cooling for the COB LED and prevents it from overheating.




OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable 350° and 90°
Light distribution symmetry	Symmetric
Beam angle	24°
Color temperature	2700K-6000K

LED light to be installed on 3-phase 4 wire track.

ELECTRICAL

Wattage	15 W, 20 W, 30 W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60 HZ
Voltage	220-240 V




PHYSICAL

Spot diameter (mm)	Ø 95
Construction material	Aluminium
Weight (kg)	1,0
Luminaire lifespan	50 000h
LED module	PHILIPS/BRIDGELUX COB
Driver	LIFUD Flicker free, ALL-LOOKING Optional drivers: DALI, DIM
Working temperature	-30 to +40 °C
Warranty	5 years from purchase date

- White matte
- Gray matte
- Black matte

Dimensions: Ø95 x 180mm

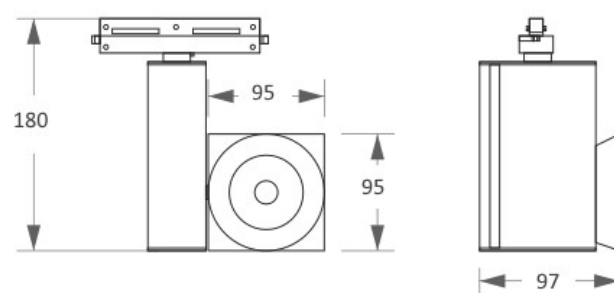

CERTIFICATIONS

