


LED Track Light Lumi-Line linear Datasheet



Number of heads	1
Mounting	Track mounting
Lamps description	LED 20W, 30W 3000K, 3500K CRI >90+
Luminaire luminous flux	2200lm
Voltage (V)	220-240
Environment	Indoor
Notes	Track light Lumi-Line linear driver is located inside the thin luminaire adapter. The lens is adjustable from 36 degrees and that makes it a perfect luminaire for commercial spaces.

LED light to be installed on 3-phase 4 wire track.



OPTICAL

Reflector finish	Aluminum + PVC
Aiming	Adjustable 350 degrees
Light distribution symmetry	Symmetric
Beam angle	36°
Color temperature	3000K, 3500K

ELECTRICAL Wattage


Transformer mounting	20W, 30W
Transformer type	Integral
Frequency	Electronic
Voltage	50-60HZ 220-240V AC

- White Dimensions: L1000xH22xW30mm
- Black Dimensions: L1200xH22xW30mm

PHYSICAL

Construction material	6063 ALU
Weight (kg)	0,6
Luminaire lifespan	30 000h
LED module	PHILIPS/BRIDGELUX COB LED
Driver	100Lm/W Flicker free, PHILIPS SLIM Lifud, DIM
Working temperature	Operation: -30 to +40 °C

Lumi-Line dimensions

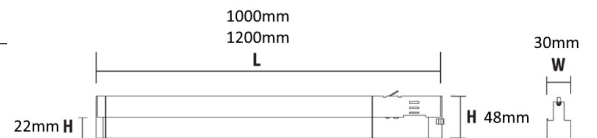

CERTIFICATIONS

