


LED Track Light NEW BONN Datasheet



Number of heads	1
Mounting	Track mounting 1-phase and 3-phase
Description	LED 15W; 20W; 30W, 3000-3500-4000K, CRI 90+
Luminaire luminous flux	95-110lm/W
Voltage (V)	220/240
Environment	Indoor
Notes	LED Track Light NEW BONN is also available with Triac DIM. The driver is located inside of the housing.

LED light to be installed on 1-phase 2 wire track or 3-phase 4 wire track.

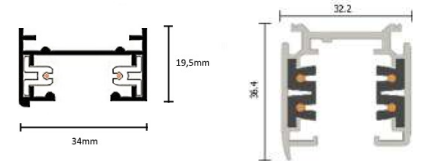

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable 350 and 90 degrees
Light distribution symmetry	Symmetric
Beam angle	24° Medium
Color temperature	3000-3500-4000K

Color

- White
- Black

ELECTRICAL

Wattage	15W, 20W, 30W and 15W DIM, 20W DIM, 30W DIM
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60HZ
Voltage	220-240V AC

Dimensions: 160 x Ø60mm

Dimensions: 190 x Ø70mm

Dimensions: 190 x Ø80mm

PHYSICAL

Spot diameter (mm)	Ø 60, Ø 70, Ø 80
Construction material	6063 Aluminium
Weight (kg)	0,45; 0,65; 0,95
Luminaire lifespan	30 000h
LED module	BRIDGELUX COB LED 100 lm/W
Driver	LIFUD Flicker free, TRIAC DIM
Working temperature	Operation: -30 to +40 °C

CERTIFICATIONS

