



LED Track Light B-series 40W Datasheet




Number of heads	1
Mounting	Track mounting
Lamps description	Heavy heat sink, CRI 90
Luminaire luminous flux	120 lm/W
Voltage (V)	220-240
Environment	Indoor
Notes	LED track light B-series Lifud no flicker driver housing is located on the outside of the luminaire. This allows the track light better cooling and prevents COB LED overheating.

OPTICAL


Reflector finish	Aluminum high quality GR reflector
Aiming	Adjustable 350° and 90°
Light distribution symmetry	Symmetric
Beam angle	15°, 24°, 36°, 60°
Color temperature	3000K, 3500K, 4000K, 5000K, 6000K

LED light to be installed on 3-phase 4 wire track.



ELECTRICAL

Wattage	40 W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60 HZ
Voltage	220-240 V




PHYSICAL

Spot diameter (mm)	Ø 85
Construction material	Aluminium
Weight (kg)	1,6
Luminaire lifespan	50 000h
LED module	BRIDGELUX COB LED
Driver	Lifud, Flicker free
Working temperature	-30 to +40 °C
Warranty	1 years from purchase date

Dimensions

40W

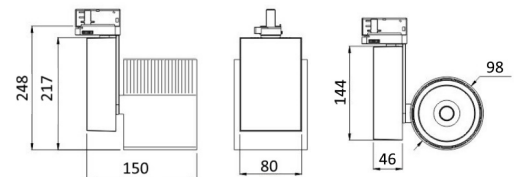

CERTIFICATIONS

