

UBE HIGHBAY LUMINAIRE

PRODUCT DATASHEET
UBE130_100W_LED_15000

LED high bay luminaire for suspended instalation, with lens optic for high mounting applications. Electronic, fixed output control gear. IP65 IK08. Housing : die-cast aluminum. Lens/Diffuser: Polycarbonate (PC). Optics 90° . Equipped with quick fit electrical connection. Complete with 4000K LED.



IP65	IK08	130,52 lm/W
------	------	-------------

TECHNICAL DATA		SKU:	6009000004
Electrical data			
Nominal wattage	100W		
Operating wattage	99.6W		
Nominal Voltage	165-240 V		
Power factor	≥0.95		
Mains frequency	50/60 Hz		
Photometrical data			
Color temperature (CCT)	4000 K		
Luminous efficacy	130.52 lm/W		
Luminous flux	13000 lm		
Color rendering index (CRI)	≥80		
Unified Glare Rating (UGR)	<21,5		
Flicker index	Flicker-Free		
Light technical data			
Beam angle	90°		
Dimensions and weight			
Diameter	Ø258		
Height	139 mm		
Weight Neto	1,924 kg		
Materials			
Body material	Aluminium		
Housing color	Black		
Difuser material	Polycarbonate (PC)		
Operating conditions			
Ambient temperature range	-30...+50°C		
Lifespan			
Lifespan L80/B50 at 25°	50000 h		
Led Brand	PHILIPS		
Driver	SOSEN		

Mounting information

Mounting type	Suspended
Mounting location	Ceiling
Capabilities	
Dimmable	0-10V
Type of connection	4 Pole cable
Standards and Certificates	
Protection class IK	IK08
Type of protection IP	IP65
Standards	CE, RoHS
Warranty	60 months

LOGISTICAL DATA


Main package

Product code	6009000004
Package	Carton box
Units in carton	1 pcs
Package diameters, weight bruto	305x310x160mm ; 2,585 kg
Product EAN code	4772007010257


ACCESSORIES

- Mounting hook included

ENERGY EFFICIENCY

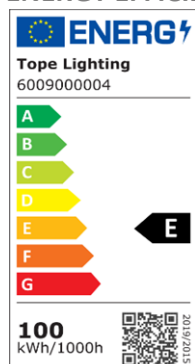

PHOTOMETRIC DIAGRAM

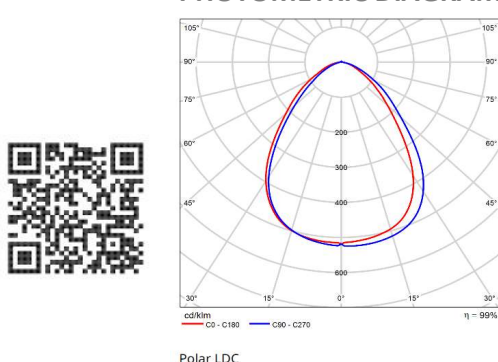

DIMENSIONS



ALL FAMILY PRODUCTS

6009000004	UBE130_100W_LED_15000
6009000005	UBE130_150W_LED_20000
6009000006	UBE130_200W_LED_30000
6009200004	UBE130_100W_LED_15000_EM
6009200005	UBE130_150W_LED_20000_EM
6009200006	UBE130_200W_LED_30000_EM

