



LED Track Light Berlin Slim DALI DIM UGR Datasheet

Number of heads	1
Mounting	Track mounting
Lamps description	LED 20 W, 30 W, CRI 90
Luminaire luminous flux	100 lm/W
Voltage (V)	220-240
Environment	Indoor
Notes	LED Track Light Berlin Slim driver is located inside of the thin luminaire adapter. This makes it possible to avoid additional heat when operating the luminaire.

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable 350° and 90°
Light distribution symmetry	Symmetric
Beam angle	15°, 24°, 40°, 60°
Color temperature	3000K, 3500K, 4000K
UGR	19

ELECTRICAL


Wattage	20 W, 30 W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60 HZ
Voltage	220-240 V

PHYSICAL

Spot diameter (mm)	Ø 70
Construction material	Aluminium
Weight (kg)	1,0
Luminaire lifespan	50 000h
LED module	PHILIPS/BRIDGELUX COB LED
Driver	KGP DALI DIM
Working temperature	-30 to +40 °C
Warranty	5 years from purchase date




LED light to be installed on 3-phase 4 wire track.



● White ● Black

Dimensions: Ø70 x 245mm

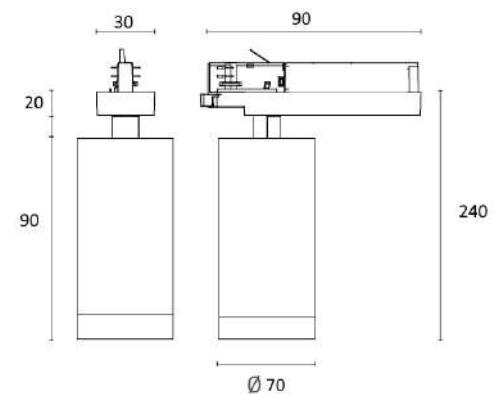

CERTIFICATIONS

