

PRODUCT DATASHEET

SOPOT_2x36W_S_LED_6740

Surfaced square LED luminaire. Electronic, Infrared wireless dimmable and CCT adjustable output control gear. Body white painted steel.
Diffuser: Polycarbonate (PC).
IP20. 3000 to 6500K CCT adjustable.
Remote included to the set.



IP20

IK05

104,35 lm/W

TECHNICAL DATA

SKU:

6004000075

Electrical data

Nominal wattage	2x36 W
Operating wattage	64,51 W
Nominal Voltage	165-240 V
Power factor	≥0.90
Mains frequency	50/60 Hz

Photometrical data

Color temperature (CCT)	3000 to 6500 K
Luminous efficacy	104,35 lm/W
Luminous flux	6732 lm
Color rendering index (CRI)	≥80
Unified Glare Rating (UGR)	<21.5
Flicker index	Flicker-Free

Light technical data

Beam angle	120°
------------	------

Dimensions and weight

Dimension	475x475x60 mm
Weight Neto	1,526 kg

Materials

Body material	Steel
Housing color	White
Difuser material	Polycarbonate (PC)

Operating conditions

Ambient temperature range	-20...+65°C
---------------------------	-------------

Lifespan

Lifespan L70/B50 at 25°	30000 h
Led Brand	EPISTAR
Driver	TOPE (25-40W*2(MAX))

Mounting information

Mounting type	Surface
Mounting location	Ceiling

Capabilities

Dimmable	Yes
Type of connection	Via wires terminal blocks
Standards and Certificates	
Protection class IK	IK05
Type of protection IP	IP20
Standards	CE, RoHS
Warranty	36 months

LOGISTICAL DATA

Main package


Product code	6004000075
Package	Carton
Units in carton	1 pcs
Package diameters, weight bruto	495x485x85mm ; 1,860 kg
Product EAN code	4772007009251

Second package


Package	Carton box
Folding carton boxes in shipping carton	6 pcs
Package diameters, weight bruto	520x515x510mm ; 12,320 kg
Shipping carton EAN code	4772007009275

ACCESSORIES

ENERGY EFFICIENCY

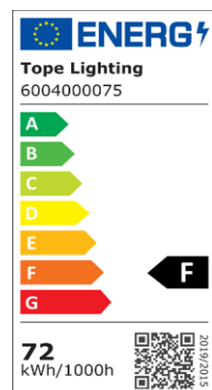

PHOTOMETRIC DIAGRAM

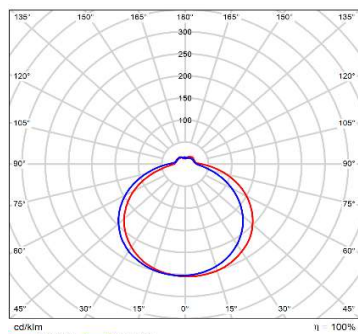

Polar LDC

ALL FAMILY PRODUCTS

6004000074 SOPOT_2x24W_S_LED_4470
 6004000075 SOPOT_2x36W_S_LED_6740

