
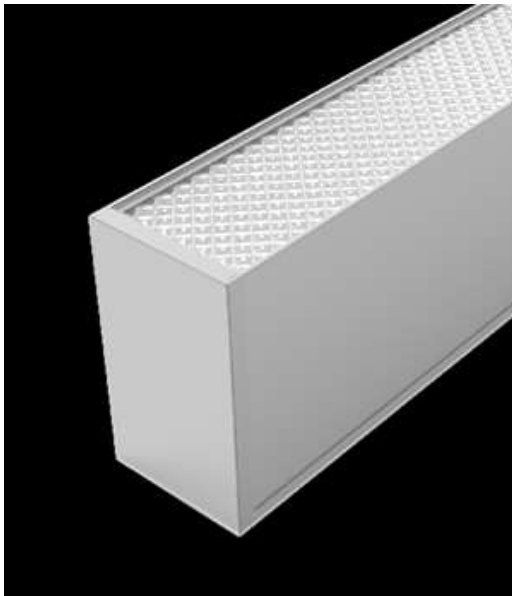
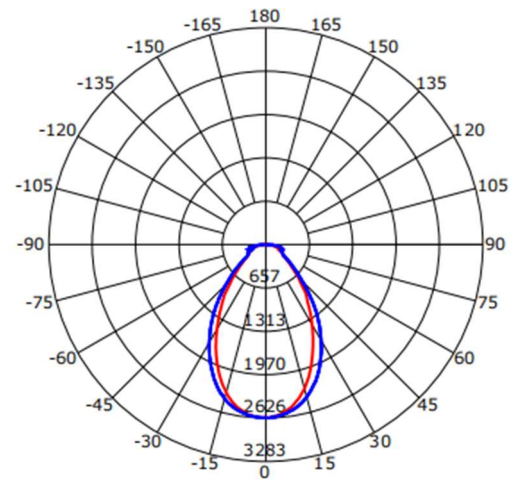


FJD5085

◆Product pictures		◆Sizes					
							
◆ Product Specification							
Model number	ZD-FJD5085	Size	L1200 /W50 /H85 mm		installation	Suspension & surface	
Housing color	BK/WH	Material	Aluminum+ Anti glare lens				
Remark							
◆Product Specification							
Lm	4900lm	Power(W)	40W	CRI	80	Input voltage	220-240V
Efficiency Lm/W	123LM/W±5%	PF	0.9	UGR	<13	LED chips	2835-216p
Remark	PF>0.9, no flicker, 3 year warranty						
Beam angle					65 deg		

Lamp Product Specification

FJD5085

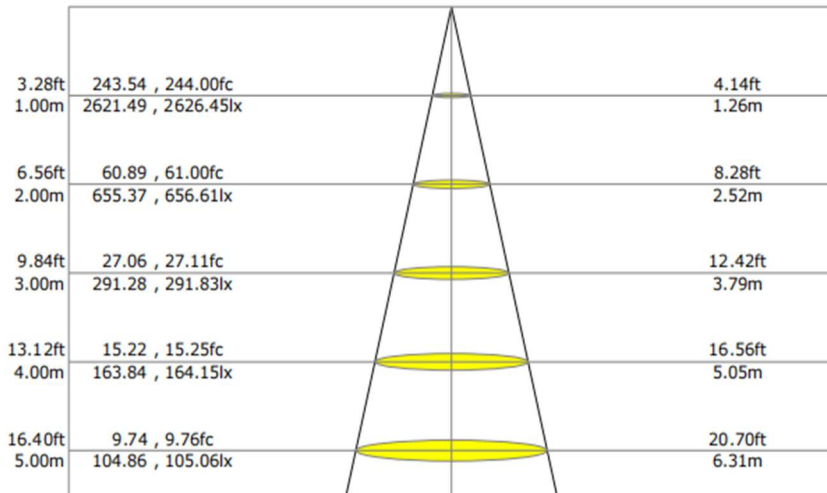

FJD5085

◆ Configuration related

Remark

Power adjustable 32W-36W-40W



◆ Lighting effect related

Model

ZD-FJD5085

Size


L1200 /W50 /H85 mm

Height


2.8M

number


Remark

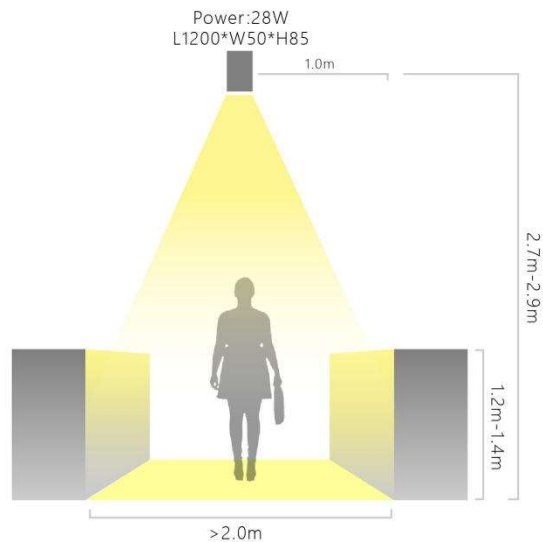


◆ Installation instructions

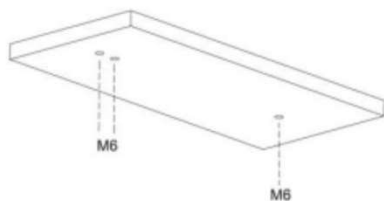


- 1 Depend on the lights size, open two screw holes, distance between two lights about 60-90cm

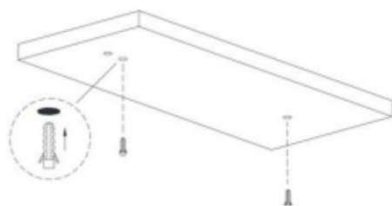



- 2 As per pictures, fit the accessories to ceiling

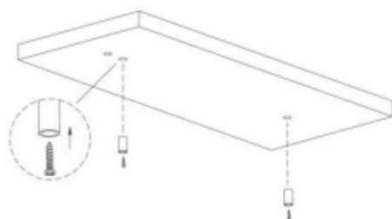


- 3 As per pictures No. 5, , fit the accessories the light

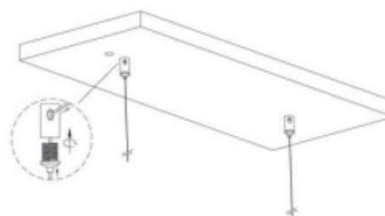


- 4 Connect power cable to electricity

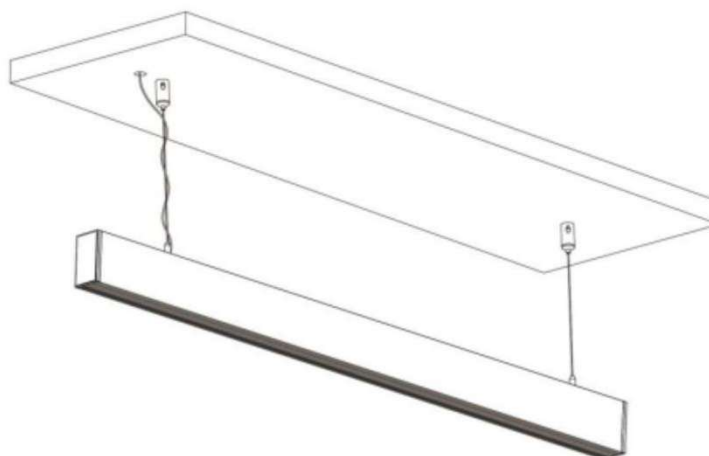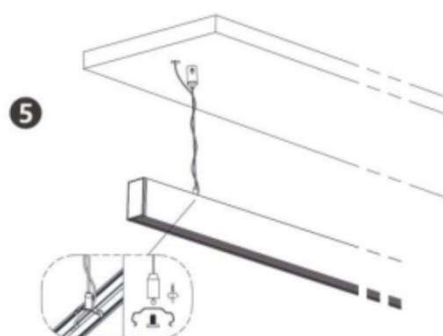


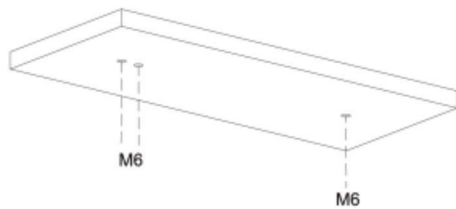

- 1 Depend on the lights size, open two screw holes, distance between two lights about 60-90cm

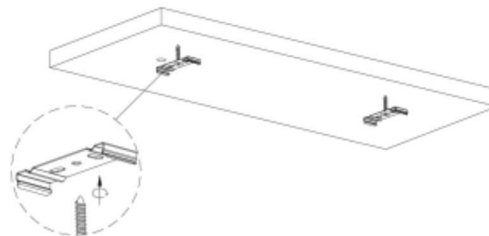


- 4 Adjust position, fit the surface mount clips to ceiling

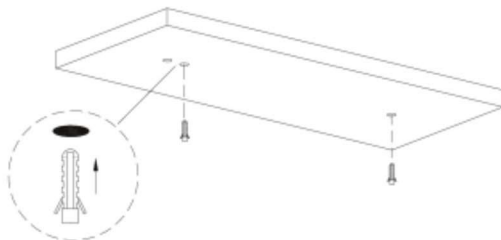

- 2 As per pictures 3 and 4 fit the accessories to ceiling



5. Fit slot of back for light to surface mount clips, Connect power cable to electricity

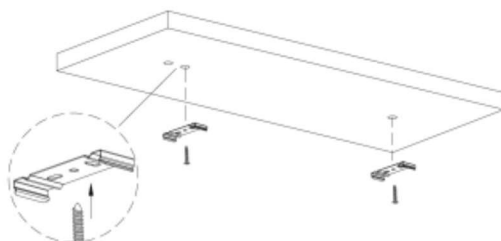

- 3 Adjust position, fit the surface mount clips to ceiling

